


# GRIPSURE<sup>®</sup> NON SLIP TIMBER DECKING MADE FROM ACCOYA<sup>®</sup>

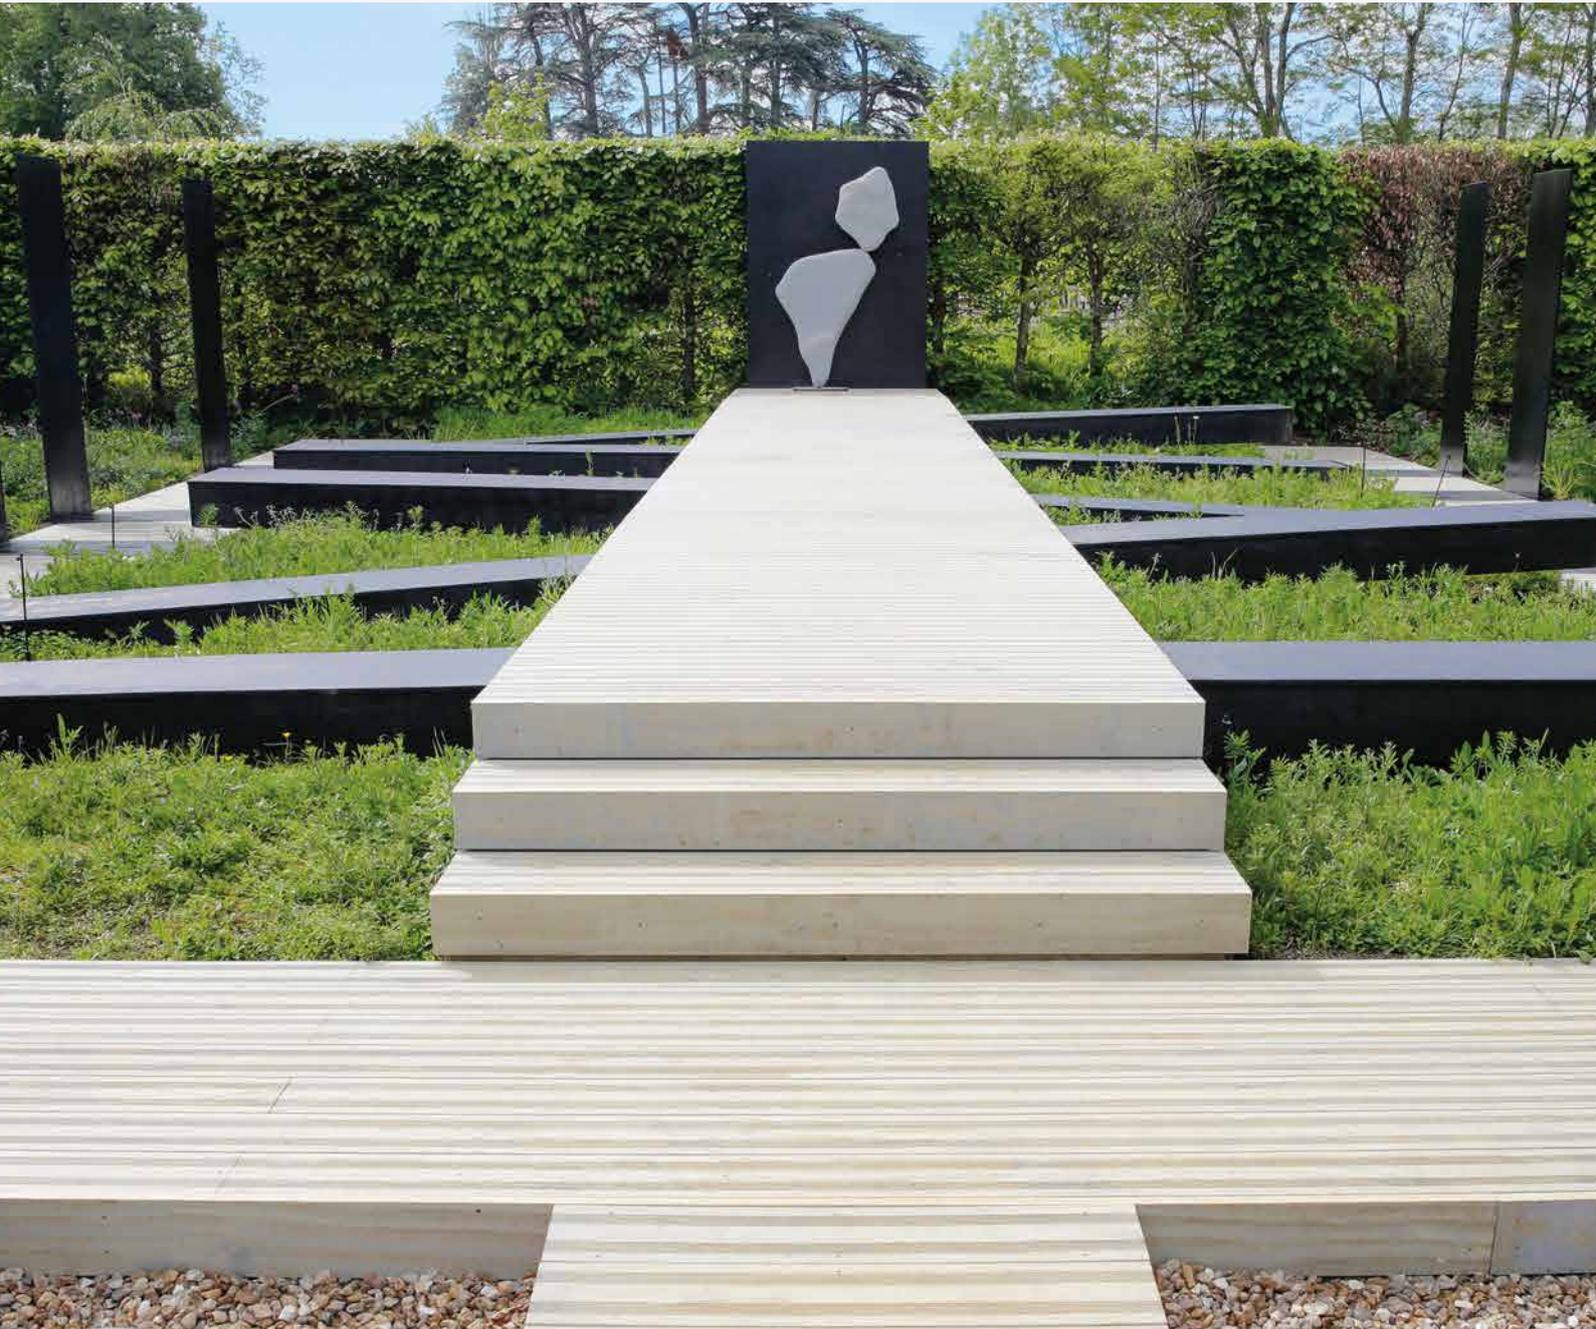

SPECIALIST MANUFACTURER AND  
SUPPLIER OF NON SLIP DECKING

Gripsure® are the UK's leading manufacturer of non slip decking - with over 30 years of experience in resin and aggregate coated surfaces.

When choosing a material to create a wood deck; beauty, strength and all-weather performance are important. Accoya®'s long life wood will not warp, split, swell or be affected by fungi, water uptake or rot. All these features combined with durable non slip inserts mean that Gripsure non slip decking made with Accoya® benefits from long-life and low maintenance decking with high performing slip resistance for safe use all year round.

## TRIED AND TESTED

Accoya® wood has been tested over prolonged periods in all types of weathering conditions – above ground, below ground and even in water for 20 years – and has been proven to withstand the toughest external environments.

## OUTSTANDING DURABILITY

Accoya® wood's durability (rot resistance) is Class 1, matching and even exceeding the performance of nature's most durable woods such as Oak, Teak, Iroko and Sapele. Every batch of Accoya® wood is tested after production to ensure that its durability can be guaranteed.

## SUSTAINABLE CHOICE

By significantly enhancing the durability and dimensional stability of fast growing, abundantly available certified wood species, Accoya® wood provides compelling environmental advantages over scarce slow growing hardwoods, woods treated with toxic chemicals, and non-renewable carbon-intensive materials such as plastics, steel and concrete.

## 10 YEAR NON SLIP GUARANTEE

Gripsure Accoya® decking comes with a 10 year non slip guarantee, so when it comes to eliminating the risk of accidents, you can rely on Gripsure to outperform other products – guaranteed. As measured under BS7976 using the pendulum test (recommended by the HSE) and the guidelines from the UK Slip Resistance Group.

## CUTTING

Gripsure non slip decking uses an aggregate that is extremely hard, that will blunt conventional blades very quickly.

Gripsure recommend the following blade as suitable for cutting both timber and aggregate inserts: Stehle 250mm x 30mm bore Z=16 2.2mm width PCD (poly crystalline diamond) saw blade.

Alternatively, the aggregate only can be 'cut' using a hand held angle grinder, and then cut through the rest of the timber board with a conventional hand saw or chop saw.

## FIXING

Stainless steel decking screws must be used for fixing Gripsure decking made from Accoya®.

## PROFILE

A smooth decking board finished with two non slip infills for enhanced slip resistance reducing the chance of slips and falls.

Nominal size: 150mm x 32mm

Lengths: 2m - 4.8m



Gripsure UK Ltd  
Unit 2, Rockhill Business Park  
Bugle, St Austell PL26 8RA

E. [info@gripsure.co.uk](mailto:info@gripsure.co.uk)  
T. +44 (0)1726 844616  
[www.gripsure.co.uk](http://www.gripsure.co.uk)