

DON'T SLIP UP... **USE NON SLIP DECKING**

GRIPSURE[®]
PRODUCT
GUIDE



GRIPSURE BOARDWALKS

Gripsure's Boardwalk range is popular with local authorities and industrial users, it can be used for disabled access ramps, bridges, footpaths, walkways, balconies and steps

The range consists of three profiles:

Boardwalk Urban is a modern looking plain deck board, with one central aggregate strip providing a great level of slip resistance. Available in a hardwood option.

Boardwalk Heritage retains a timber edge for a great look, whilst being exceptionally slip resistant.

Boardwalk HD is a plain faced deck board, fully coated with an extremely durable and hard wearing anti slip aggregate, making it tough, long lasting and very safe.

- Made from Scandinavian Redwood Vth's grade timber- slow grown, with smaller live knots
- 15 year 'in service' life for the timber preservative treatment - other options available
- 5 year warranty on inserts
- FSC® certified timber

Urban



Nominal size of profile: 150mm x 32mm

Finished size of profile: 145 x 28mm

Lengths: 2.4m, 3.6m, 4.8m

Finish: 30mm non slip aggregate strip

Heritage



Nominal size of profile: 150mm x 32mm

Finished size of profile: 145 x 28mm

Lengths: 2.4m, 3.6m, 4.8m

Finish: 100mm non slip aggregate strip

HD



Nominal size of profile: 150mm x 32mm

Finished size of profile: 145 x 28mm

Lengths: 2.4m, 3.6m, 4.8m

Finish: 130mm non slip aggregate strip

GRIPSURE HARDWOOD

Gripsure Hardwood decking is an extremely high quality timber, the standard option being Yellow Balau and is ideal for situations where style and appearance are paramount.

Extremely strong and hard wearing, these boards are ideal for any application such as commercial decking areas, balconies, ramps, bridges, platforms, steps and jetties.

Available as a grooved (as shown opposite) or a smooth profile (as shown below) with two non slip aggregate strips as standard.

- 5 year warranty on inserts
- 50+ year expected in service life
- FSC® sourced timber available

Other hardwood options are available on request please see examples below.

Yellow Balau grooved



Finished size of profile: 28mm or 21mm x 145mm

Lengths: Available on request standard 2m - 4.5m

Finish: Smooth or grooved profile with two non slip aggregate strips

Yellow Balau smooth



Cedar



Oak



Larch



Iroko



Massaranduba



Ipe



Cumaru



Ekki



GRIPSUREAQUADECK™

Gripsure Aquadeck® is a unique development in non slip timber decking, allowing water to drain through the board back into the water course below, unlike traditional rubber infill decking boards which can retain up to 0.6 litres of water per board.

The non slip rubber crumb infills are softer underfoot than aggregate infills and suitable for application at schools and play areas. The drainage benefits of Gripsure Aquadeck® also make it suitable for jetties, pontoons and around swimming pools and hot tubs.

Gripsure Aquadeck® is available in a green and black fleck finish as standard but other fleck or solid colour options are available please see the colour chart below.

- Scandinavian Redwood Vth's grade timber - slow grown, with smaller live knots
- 15 year 'in service' life for the timber preservative treatment - other options available
- FSC® certified timber
- SuDS compliant
- Soft underfoot

Colour chart



Fleck - Green and Black




Nominal size of profile: 150mm x 32mm

Finished size of profile: 145 x 28mm

Lengths: 2.4m, 3.6m, 4.8m

Finish: Two rubber crumb strips with fleck colour

Solid colour - Light green

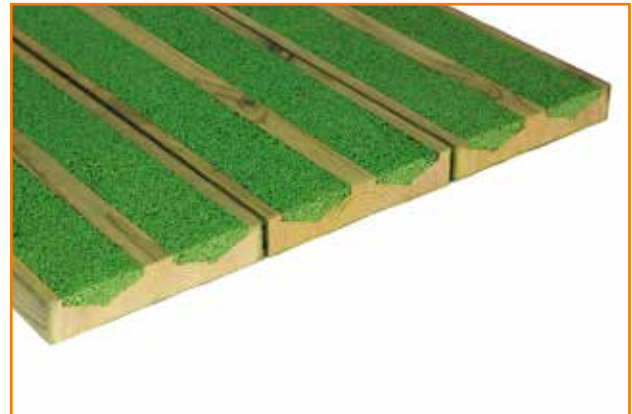

Nominal size of profile: 150mm x 32mm

Finished size of profile: 145 x 28mm

Lengths: 2.4m, 3.6m, 4.8m

Finish: Two rubber crumb strips with solid colour

GRIPSUREPRO

Gripsure's Pro range is popular with local authorities and industrial users, it can be used for commercial or residential decking areas, balconies, ramps, bridges, platforms and steps.

The range consists of three profiles:

Gripsure Pro Classic our original non slip decking board with the highest safety rating on the market and is ideal for high profile projects.

Gripsure Pro Castellated a traditional profile, with deeper grooves to aid drainage, very versatile and functional for a variety of applications.

Gripsure Pro Contemporary this smooth profile gives a sleek and modern look with clean lines and minimum fuss while delivering a high slip resistance.

- Made from Scandinavian Redwood Vth's grade timber- slow grown, with smaller live knots
- 15 year 'in service' life for the timber preservative treatment - other options available
- 5 year warranty on inserts
- FSC® certified timber

Pro Classic



Nominal size of profile: 150mm x 32mm

Finished size of profile: 145 x 28mm

Lengths: 2.4m, 3.6m, 4.8m

Finish: Grooved with three non slip aggregate strips

Pro Castellated



Nominal size of profile: 150mm x 32mm

Finished size of profile: 145 x 28mm

Lengths: 2.4m, 3.6m, 4.8m

Finish: Grooved with two non slip aggregate strips

Pro Contemporary



Nominal size of profile: 150mm x 32mm

Finished size of profile: 145 x 28mm

Lengths: 2.4m, 3.6m, 4.8m

Finish: Smooth with two non slip aggregate strips

Key features and benefits



Peace of mind - no accidents



FSC® certified C109573



Credible & proven performance



Virtually maintenance free



5 Year warranty on inserts



Quick & easy to install

Key Customer Benefits:

- Peace of mind – safety – no accidents.
- Credible and proven performance.
- Sustainably sourced timber.
- Virtually maintenance free.
- No cleaning required.
- Excellent value for money over the years.
- Quick & easy - no increased fitting costs.

Benefits for merchant

- Growth area in decking market.
- Value added product.
- Increased margin.
- Compliments existing timber decking offer.
- Simple sale - 'does what it says'.
- Add-on sales – steps, ramps, walkways.
- Fast delivery.

Non-slip decking for peace of mind all year round

Over the seasons decking will become very slippery underfoot. Innovative non slip decking from Gripsure combines natural timber decking with aggregate non slip infills, that even work through snow and ice, ensuring safe use all year round.

Timber treatment

All Gripsure preservative treated timber deck boards carry a 15-year treatment in service life and on request treatments to 25-years or 30-years are available, along with Use Class 4 and Sector Scheme 4 (Highways Agency) treatment.

Timber grading

Timber boards are available graded to BS 4978:1996 Strength Class C16 or C24.

C16 is suitable for most landscaping and commercial applications.

C24 is suitable for applications where there may be higher loads or there is the need for wider joist centres.

How to cut Gripsure non slip decking

STEP 1:

Begin by marking the board at the desired length, use a set square to mark across the inserts.



STEP 2:

Using a diamond disk blade and a hand held angle grinder, cut through the aggregate only.



STEP 3:

Finally, cut through the rest of the timber board with a chop saw or hand saw.



ALTERNATIVE:

Use a Stehle 250mm x 30mm bore Z=16 2.2mm width polycrystalline diamond disk blade to cut straight through the aggregate and timber board in one cut.

FULL CUTTING INSTRUCTIONS CAN BE FOUND AT WWW.GRIPSURE.CO.UK/CUTTING
ALL CUT ENDS, NOTCHES AND DRILL HOLES NEED TO BE TREATED WITH AN END GRAIN PRESERVATIVE